



Model CT36IU 36" Unframed Induction Cooktop

Induction cooking has been used in Europe for decades by professionals and homeowners demanding the best in performance. Induction cooking is so efficient that it out-performs gas and electric cooktops. There is no wasted heat because energy is supplied directly to the cooking vessel. With Wolf's unframed induction cooktops there's no stainless steel trim, just the sophisticated, minimalist exterior subtly patterned design to hide any unsightly scratches.



Model CT36IU shown in flush mounted installation.

Features

- Can be mounted flush with top of countertop or as a frameless installation sitting on top of the countertop surface
- Easy-to-clean black ceramic glass surface is resistant to scratching, staining, impact and heat
- Induction elements heat cookware, not the glass, for a cooler, safer cooking surface
- Five high-efficiency induction elements deliver power and control
- Maximum element power: 3000 W with 4000 W boost, (2) 1800 W with 3000 W boost and (2) 1200 W
- True Simmer setting on three elements
- Melt setting on two elements
- Cookware sensing—elements will not be energized without an induction-compatible pan on the cooktop surface
- Hi-Power mode boosts power on 1800 W elements by diverting power from adjacent element—4000 W element does not divert power from adjacent element for boost
- Temperature limiter to ensure that safe operating temperature of ceramic glass is never exceeded
- Illuminated touch controls with graduated control lighting and adjustable sound frequency and volume
- Hot-surface indicator light in control panel
- Lock mode—cooktop will be locked so that no elements can be turned on
- Universal OFF turns all elements off
- Countdown timer with 1 to 99 minute range

Model Options

Design

CT36IU

Unframed

How does induction cooking work?

The electricity flows through a coil to produce a magnetic field under the ceramic cooktop. When a cast iron or magnetic stainless steel pan is placed on the ceramic glass surface, currents are induced in the cooking utensil and instant heat is generated due to the resistance of the pan. Induction only works with cooking vessels made of magnetic materials, such as cast iron and magnetic stainless steel (it will not work with aluminum or copper pots).



Model CT36IU




Hi-Power Boost Control



Model CT36IU
36" Unframed Induction Cooktop

Overall Dimensions

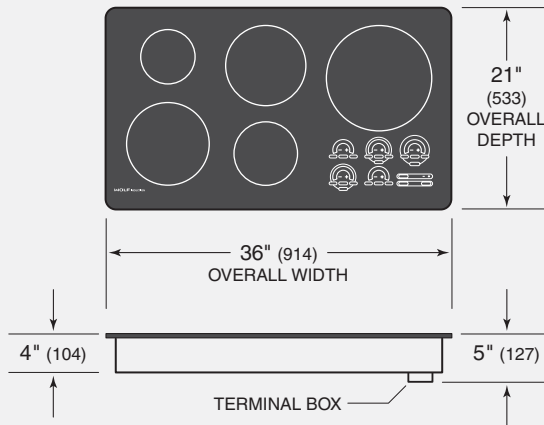

Unit dimensions may vary by $\pm 1/8"$ (3).

Specifications

| | |
|---------------------------|---|
| Overall Width | 36" |
| Overall Height | 4" |
| Overall Depth | 21" |
| Induction Elements | Five |
| Recommended Cabinet Width | 39" |
| Minimum Cabinet Width | 36" |
| Minimum Cabinet Depth | 22 ³ / ₄ " |
| Countertop Cut-Out Width | 34 ³ / ₈ " |
| Countertop Cut-Out Depth | 19 ³ / ₈ " |
| Minimum Height Clearance* | 4 ¹ / ₂ " |
| Maximum Element Power | (2) 1200 W (2) 1800 W with 3000 W boost (1) 3000 W with 4000 W boost |
| Element Diameters | 5 ¹ / ₂ ", 6 ³ / ₄ ", (2) 8 ³ / ₄ " and 11" |
| Electrical Requirements | 240/208 V AC 50/60 Hz, 50 amp circuit |
| Conduit | 4' flexible 3-wire |
| Electrical Rating | 10.2 kW at 240 V 8.9 kW at 208 V |
| Shipping Weight | 70 lbs |


*Minimum 6" clearance is required between countertop and any combustible surface directly below the cooktop.

Installation Notes


Unframed induction cooktops can be mounted flush with the top of the countertop or as a frameless installation sitting on top of the countertop surface.

Complete installation specifications can be found on our website, wolfappliance.com.

Installation Specifications

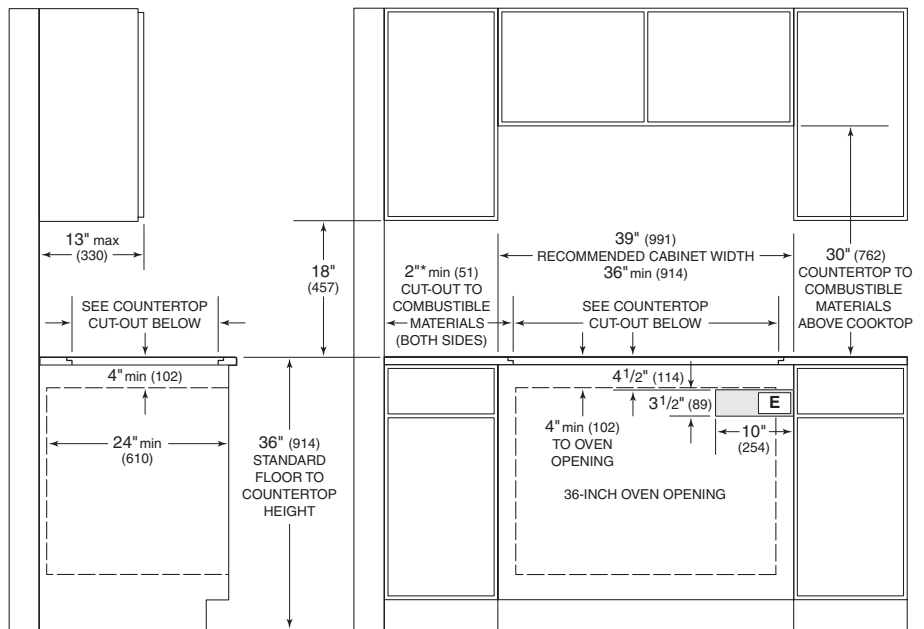

*Minimum clearance from both side edges and back edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.

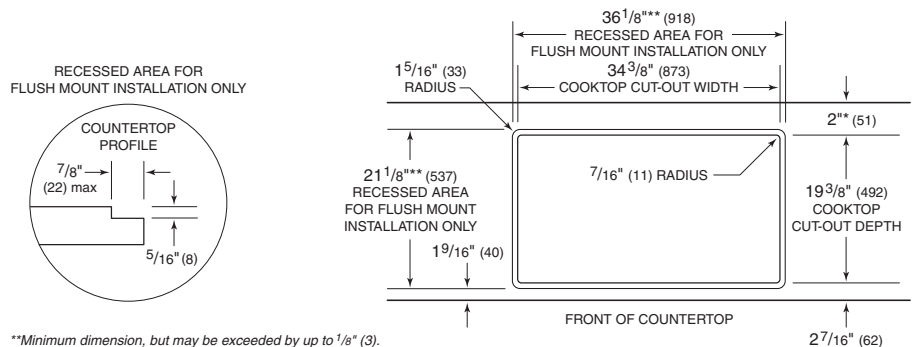

**Minimum dimension, but may be exceeded by up to 1/8" (3).

Dimensions in parentheses are in millimeters unless otherwise specified.