



Model IM15/S Integrated Gas Multi-Function Cooktop

For true wok cooking, the burner of the Wolf multi-function cooktop sculpts the gas flame into a plume, focusing heat in the center of the wok, then dispersing it outward for precisely controlled cooking. The low-profile grate fits nicely with any Wolf gas cooktop and can accommodate your largest stockpot. The powerful burner exceeds 22,000 Btu/hr. Model IM15/S is available in classic stainless steel.



Model IM15/S shown. Also shown is Model CT15G/S gas cooktop and Model DD30 downdraft ventilation system.

Features

- Integrated design allows for installation of multiple cooktops or modules
- Available in natural and LP gas
- Stainless steel top construction with classic stainless steel finish
- High output 22,000 Btu/hr dual-stacked sealed burner
- Automatic electronic reignition system
- Illuminated control panel
- Individual spark ignition system
- Two interchangeable cast iron burner grates with matte porcelain finish—wok grate and low-profile continuous grate
- Deep drawn burner pan

Model Options

	IM15/S	IM15/S-LP
Stainless Steel Finish	Classic	Classic
Type of Gas	Natural	LP


Accessories

- Filler strip for installation of multiple cooktops or modules
- Bracket supports for installation of two integrated modules with downdraft (Model DD30 only)
- High altitude conversion kit



Model IM15/S shown with wok grate

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.



Classic




Control Panel



Model IM15/S Integrated Gas Multi-Function Cooktop

Overall Dimensions

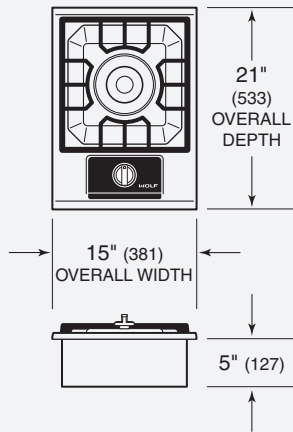


Shown with wok grate.
Unit dimensions may vary by $\pm 1/8$ ".

Specifications

Exterior Finish	Classic
Overall Width	15"
Overall Height	5"
Overall Depth	21"
Burner Rating	22,000 Btu/hr
Recommended Cabinet Width	
one module	18"
two modules	33"
Minimum Cabinet Depth	22 ³ / ₄ "
Minimum Height Clearance*	5"
Countertop Cut-Out Width	14"
Countertop Cut-Out Depth	19 ¹ / ₄ "
Electrical Requirements	120 V AC, 60 Hz 15 amp circuit
Power Cord	6' cord with grounded plug
Gas Rating	22,000 Btu/hr
Shipping Weight	30 lbs


*A minimum height clearance of 5¹/₂" is required between countertop and any combustible surface directly below the cooktop.

Installation Specifications

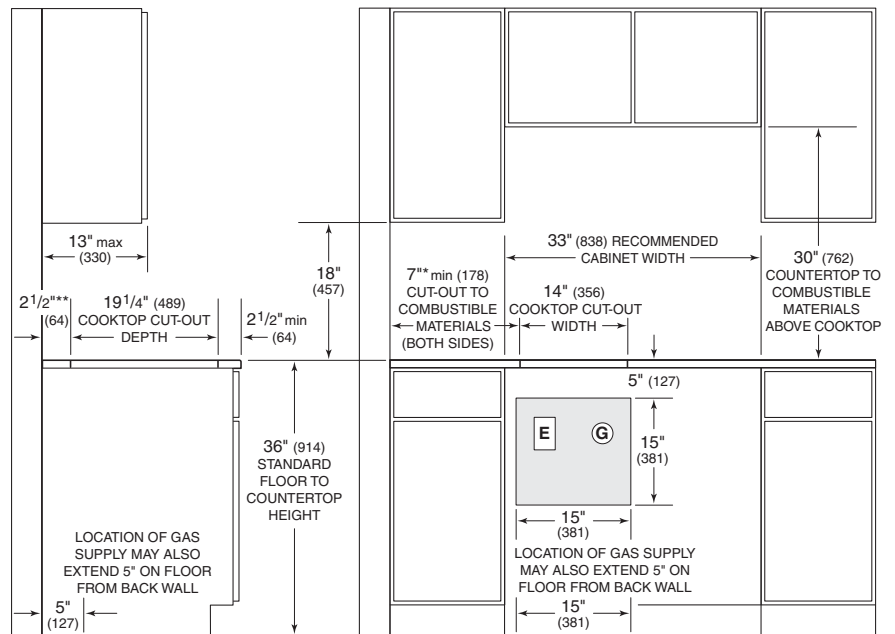

NOTE: Application shown allows for installation of two 15" (381) modules side-by-side with 33" (838) recommended cabinet width. 18" (457) recommended cabinet width for installation of single 15" (381) cooktop or module. *Minimum clearance from both side edges of cooktop cut-out to combustible materials up to 18" (457) above countertop. **Minimum clearance from rear edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.

Countertop Cut-Out Dimensions

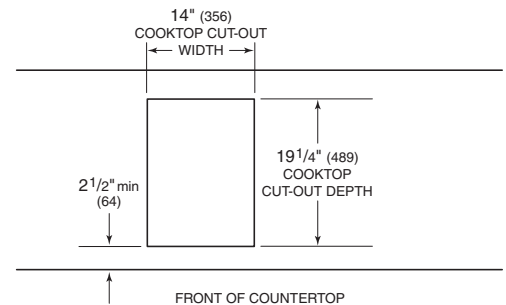

Dimensions in parentheses are in millimeters unless otherwise specified.

Installation Notes

Complete installation specifications can be found on our website, wolfappliance.com.