



Pro 24" Deep Wall Ventilation Hoods

With standard features like heat sentry and dual setting halogen lighting, Wolf Pro wall hoods provide the ultimate in ventilation. Pro 24" deep wall hoods are available in seven widths and all have the classic stainless steel finish. You also have the option of a decorative rail. While a classic stainless steel rail is standard on (R) models, platinum or brass rails are available to match the bezels of our dual fuel ranges and sealed burner rangetops.



Model PW482418 shown.

Features

- Classic stainless steel finish
- Rail (R) models feature a classic stainless steel decorative rail
- Heavy-duty, 16-gauge brushed stainless steel with continually welded seams, hemmed edges and sides
- Stainless steel enclosed liner
- Recessed easy-access controls
- Infinite-speed blower control
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed
- Halogen lighting with two settings
- Removable, dishwasher-safe, restaurant-grade stainless steel baffle filters
- Transition with backdraft damper included

Model Options

Model	PW302418	PW362418	PW422418	PW482418	PW542418	PW602418	PW662418
Overall Width	30"	36"	42"	48"	54"	60"	66"

Model numbers are for hoods without decorative rail, add (R) to the model number for rail option models.

Accessories

- Platinum or brass decorative rail and stand-offs
- 38" high classic stainless steel backsplash with or without warming racks
- 6", 12", 18" and 24" classic stainless steel duct covers
- Horizontal discharge kit
- Recirculating kit (30" and 36" wide hoods)



Model PW422418 Pro Wall Hood

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.

Blower Options

- 600, 900 and 1200 CFM internal blowers
- 600 and 1100 CFM in-line blowers
- 600, 900, 1200 and 1500 CFM remote blowers

Pro 24" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.



Recessed Controls




Baffle Filters



Pro 24" Deep Wall Ventilation Hoods

Overall Dimensions

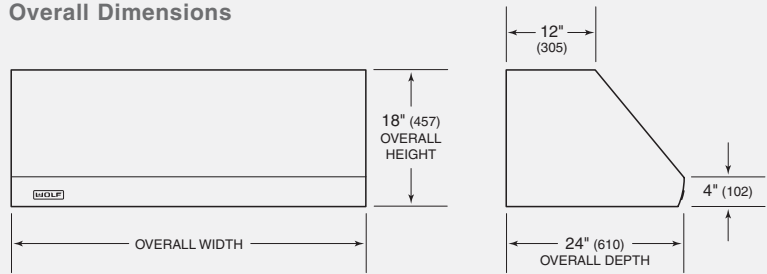

Pro 24" Deep Wall Hood



Pro 24" Deep Wall Hood—Rail (R) Model

Unit dimensions may vary by $\pm 1/8$ ".

Specifications

Exterior Finish	Classic Stainless Steel
Overall Widths	30", 36", 42", 48", 54", 60" and 66"
Overall Height	18"
Overall Depth (including rail)	24"
Bottom of Hood to Countertop	30" to 36"
Discharge	Vertical or Horizontal*
Duct Size	10" Round
Electrical Requirements	110/120 V AC 60 Hz, 15 amp dedicated circuit
Shipping Weight	84–148 lbs

*Horizontal discharge applications require a horizontal discharge kit.

Installation Notes


Pro 24" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Pro 24" deep wall ventilation hoods are recommended for use with all Wolf cooking appliances.

IMPORTANT NOTE: For optimal performance, a Pro 27" deep wall hood is recommended for use with ranges and rangetops that contain a charbroiler or griddle.

Complete installation specifications can be found on our website, wolfappliance.com.

Installation Specifications

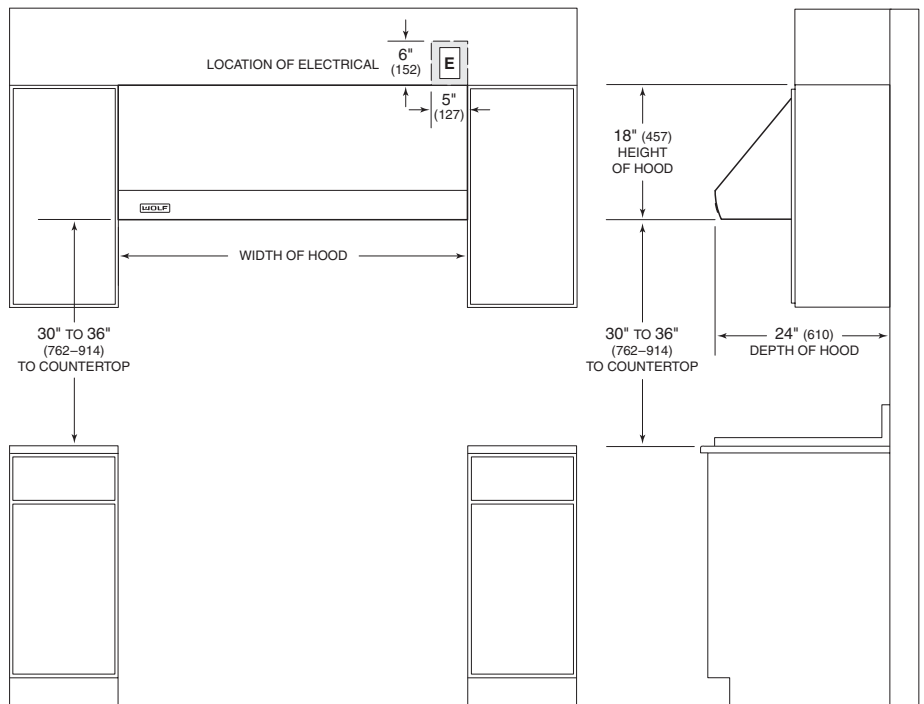

NOTE: Pro 24" (610) deep wall hoods have a vertical discharge. A horizontal discharge kit is available as a sales accessory.

Dimensions in parentheses are in millimeters unless otherwise specified.