



**Model CT30E
30" Framed Electric Cooktop**


The black ceramic glass top of the Wolf 30" framed electric cooktop is beautifully complemented by your choice of classic, platinum or carbon stainless steel trim. Three heating elements with seven zones offer exceptional control of temperature for cooking utensils of every size. A bridge connects two elements for an 8-inch by 17-inch, 4400 watt heating area. All elements offer True Simmer along with one element that enables you to set the temperature for melting.




Model CT30E with classic stainless steel trim.

Features


- Classic, platinum and carbon stainless steel trim
- Optional Model CT30E-208/S designed specifically for use with 208 V AC electrical supply
- Easy-to-clean black ceramic glass surface is resistant to scratching, staining, impact and heat—translucent surface allows you to see the glow of hot elements
- High-frequency pulsation elements improve cooking performance and control
- Three heating elements with seven zones
- Bridge-zone element connects two elements to provide a larger cooking area
- Temperature limiter to ensure that safe operating temperature of ceramic glass is never exceeded
- Illuminated touch controls with graduated control lighting
- True Simmer setting on all elements
- Melt setting on one element
- Hot-surface indicator light in control panel
- Lock mode—cooktop can be locked so that no elements can be turned on
- Universal OFF turns all elements off
- Countdown timer with 1 to 99 minute range and adjustable sound frequency and volume



Classic



Platinum




Carbon

Model Options

Model Options	CT30E/S	CT30E/P	CT30E/B	CT30E-208/S
Trim Finish	Classic	Platinum	Carbon	Classic

Maximum Element Power

- Triple-zone element power—
Model CT30E: 900 W/1800 W/2500 W
Model CT30E-208/S:
825 W/1750 W/2300 W
- Single element power: 1200 W
- Bridge-zone element power—
(2) 1800 W single elements with 800 W
bridge: 4400 W



Model CT30E

Accessories

- Filler strip for installation of multiple cooktops or modules

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.

This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.



Touch Controls




Translucent Surface



Model CT30E
30" Framed Electric Cooktop

Overall Dimensions

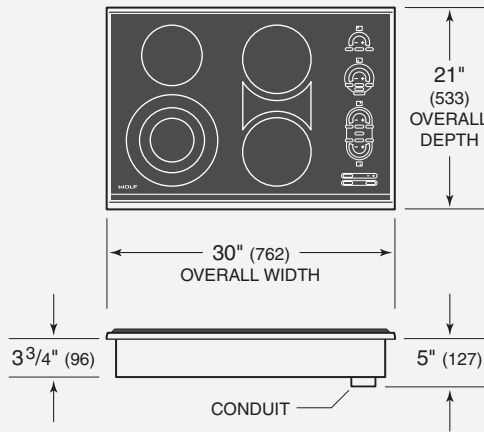

Unit dimensions may vary by $\pm 1/8"$.

Specifications

Overall Width	30"
Overall Height	3 ³ / ₄ "
Overall Depth	21"
Heating Element Outer Diameter	
(1) Triple	10"
(3) Single	(2) 8" and 6 ¹ / ₂ "
Bridge Element Dimensions	8" x 17"
Recommended Cabinet Width	33"
Minimum Cabinet Width	30"
Minimum Cabinet Depth	22 ³ / ₄ "
Minimum Height Clearance*	4"
Countertop Cut-Out**	28 ³ / ₈ " W x 19 ¹ / ₄ " D
Electrical Requirements (CT30E)	
	240 V AC / 60 Hz / 40 amp
	208 V AC / 60 Hz / 40 amp
Electrical Requirements (CT30E-208/S)	
	208 V AC / 60 Hz / 40 amp
Conduit	4' flexible 3-wire
Electric Rating (CT30E)	8.1 kW at 240 V AC 6.1 kW at 208 V AC

Electric Rating (CT30E-208/S)	7.9 kW at 208 V AC
Shipping Weight	45 lbs


*Minimum 5³/₄" clearance is required between countertop and any combustible surface directly below the cooktop.

**If the cooktop is to be used with any combination of additional cooktop units or modules with a filler strip, the cut-out width increases to 29".

Installation Notes


Complete installation specifications can be found on our website, wolfappliance.com.

Installation Specifications

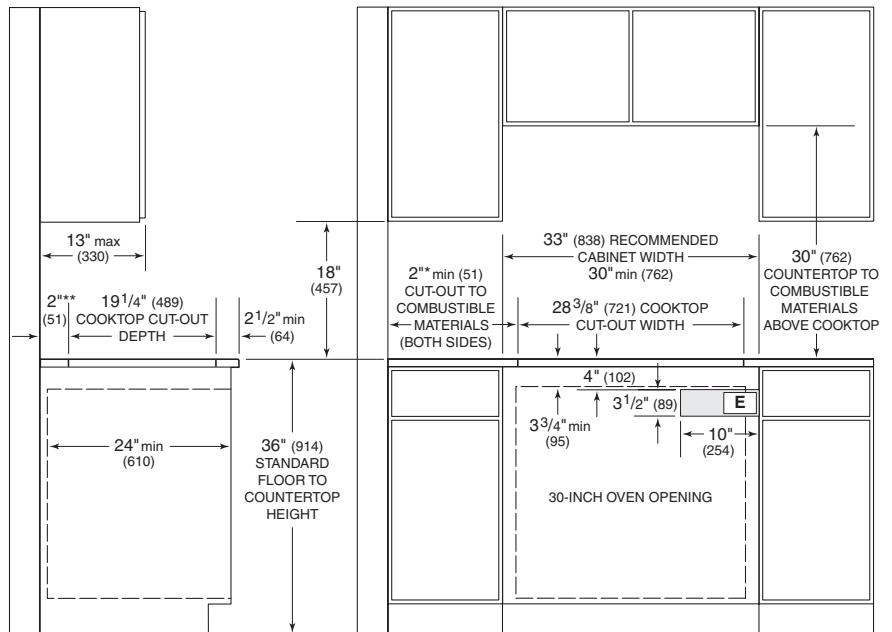

*Minimum clearance from both side edges of cooktop cut-out to combustible materials up to 18" (457) above countertop. **Minimum clearance from rear edge of cooktop cut-out to combustible materials up to 18" (457) above countertop.

Countertop Cut-Out Dimensions

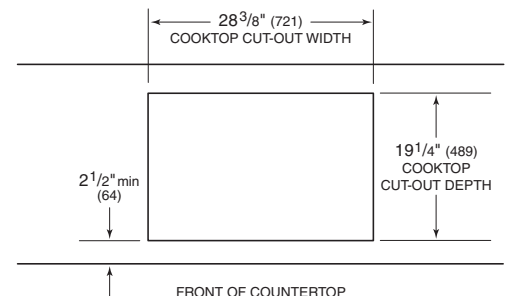

Dimensions in parentheses are in millimeters unless otherwise specified.